


Removing static IP: Windows XP and Vista users


This manual is intended for users that had a connection with their Internet Service Provider through a static IP address. And now want to access the internet via ITC.


At ITC your IP/DHCP settings should be set at automatic or else you will not be able to log into the network.

Windows XP users:

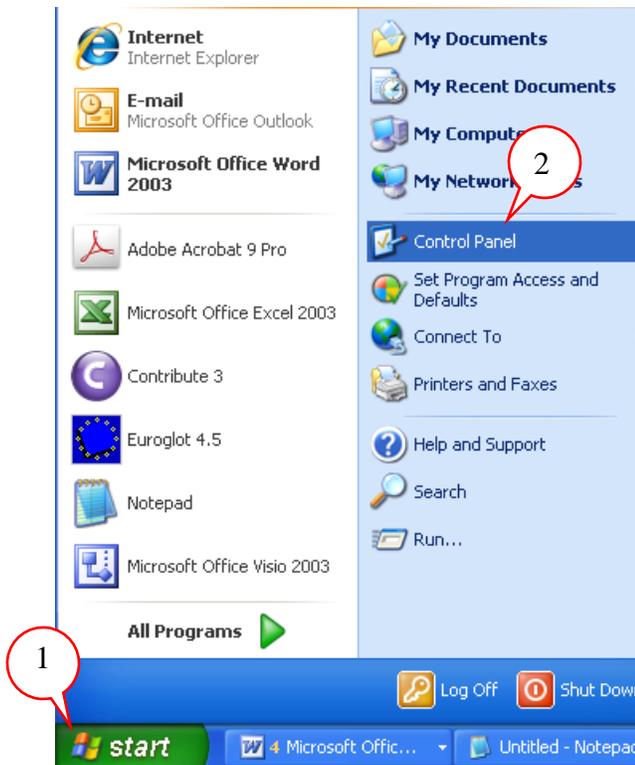


- 1) Click on the **start** button
- 2) Then **control panel**
- 3) In **control panel** double click on **network connections**

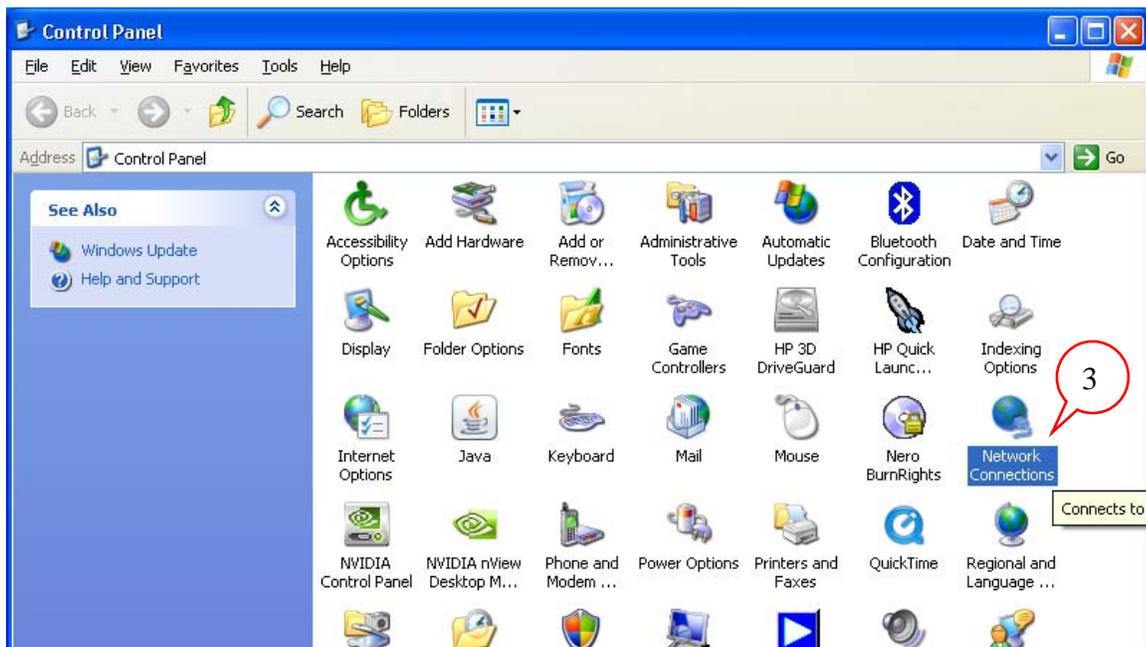

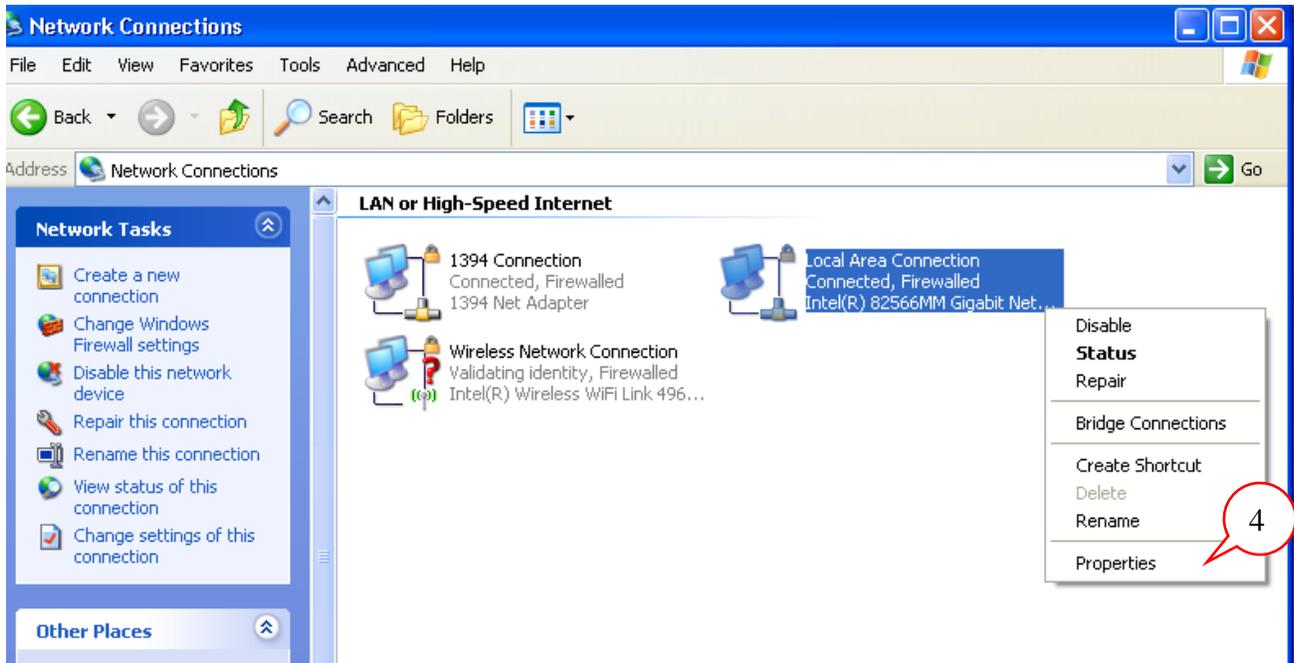


4) In the **network connection window**, select the **Local Area Connection** (the network card that's connected to the network cable). Right click and choose **Properties**.

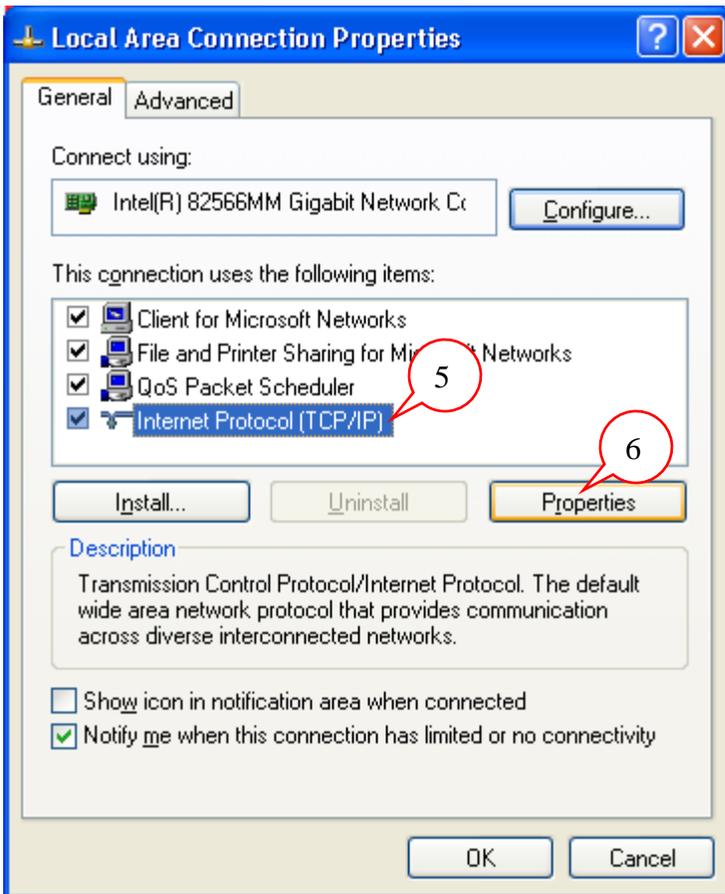

5) In the **Local Area Connection properties** window select the **Internet Protocol (TCP/IP)** item.

6) Then click on **Properties**

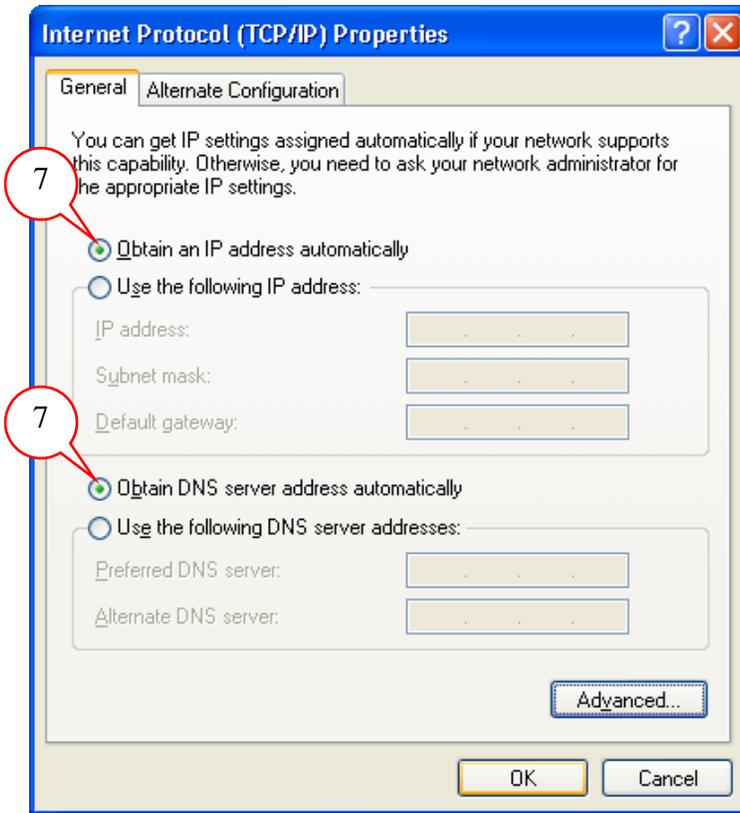


7) To remove static IP's, click the buttons next to "Obtain an IP address automatically". And "Obtain DNS server address automatically".

TCP/IP, by default, is set to "Obtain an IP address automatically" and "Obtain DNS server address automatically."

8) Click **OK** in the Internet protocol (TCP/IP) properties window. Click **OK** In the Local Area Connection properties window

For Vista users:

1) Click on the Windows **Start** button. Then, select **Control Panel**.

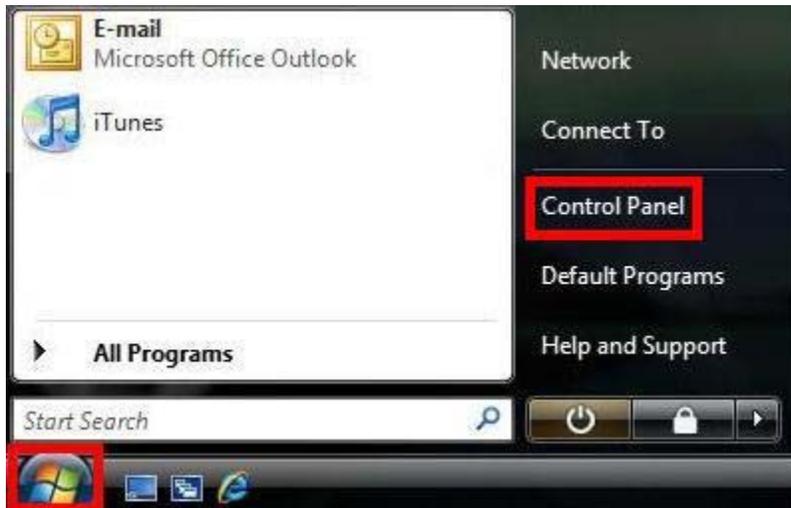


2) If the following screen appears, click on the **Classic View** link on the left.




3) Double-click on **Network and Sharing Center**.




4) Select **View Status** in the lower right.

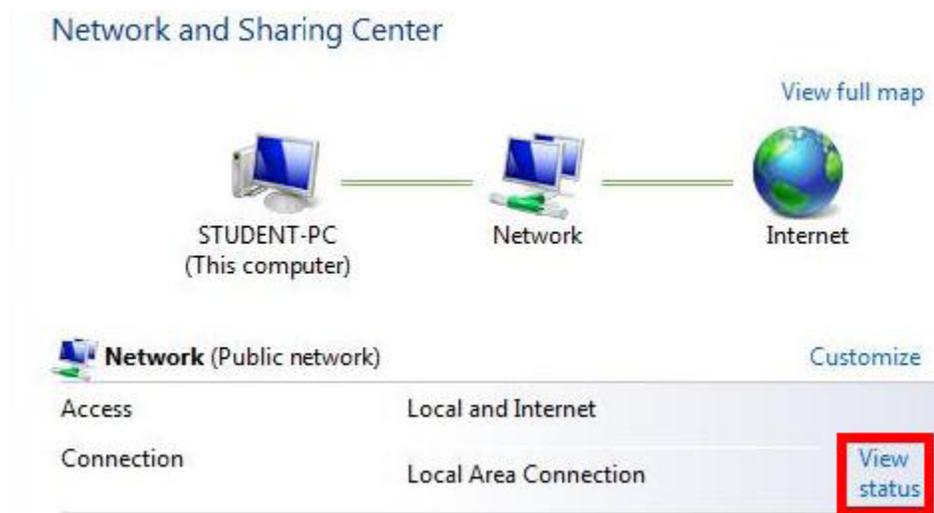


5) Select **Properties**.

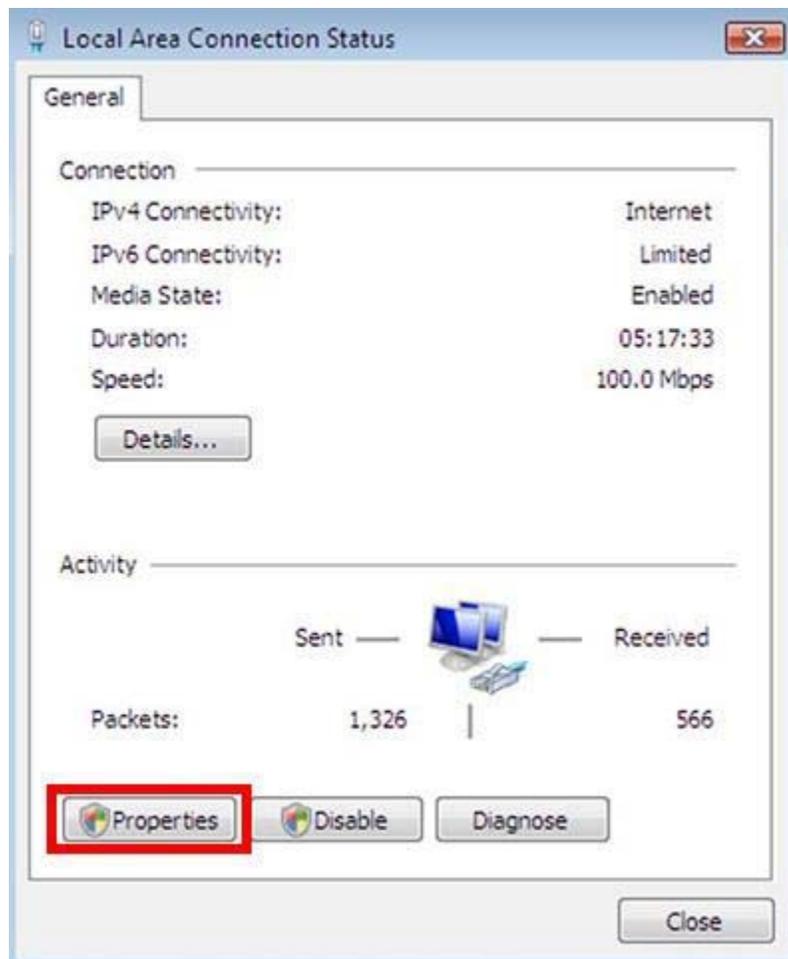

6) Highlight **Internet Protocol Version 4 (TCP/IPv4)**. Then, select **Properties**.

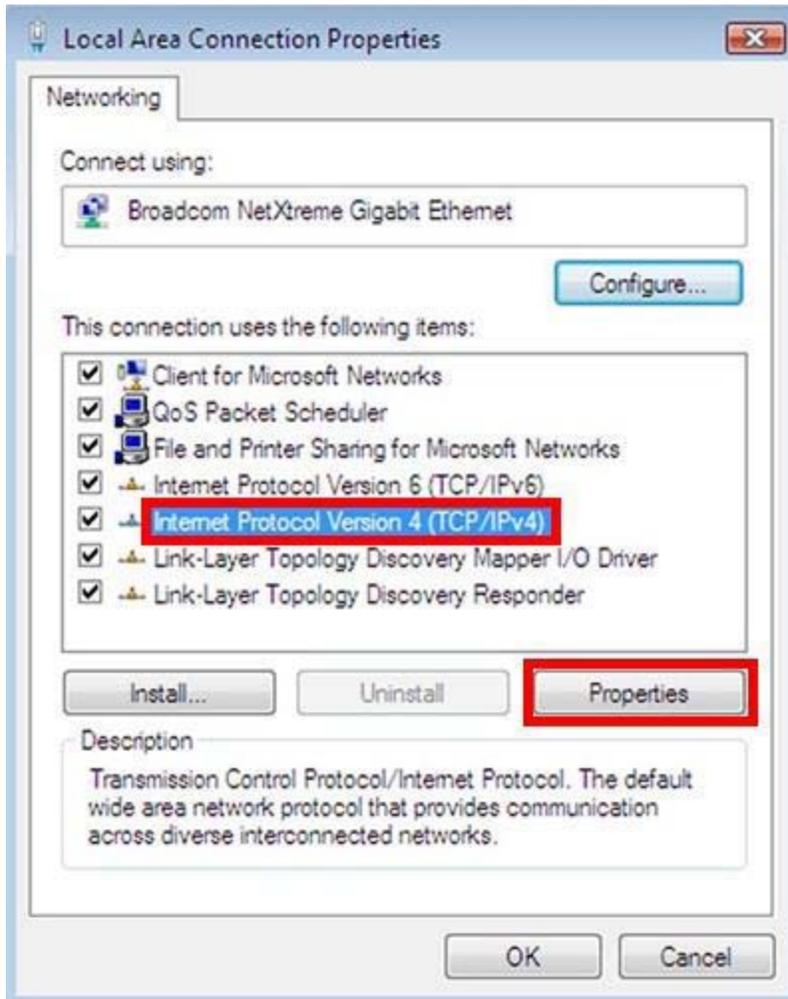

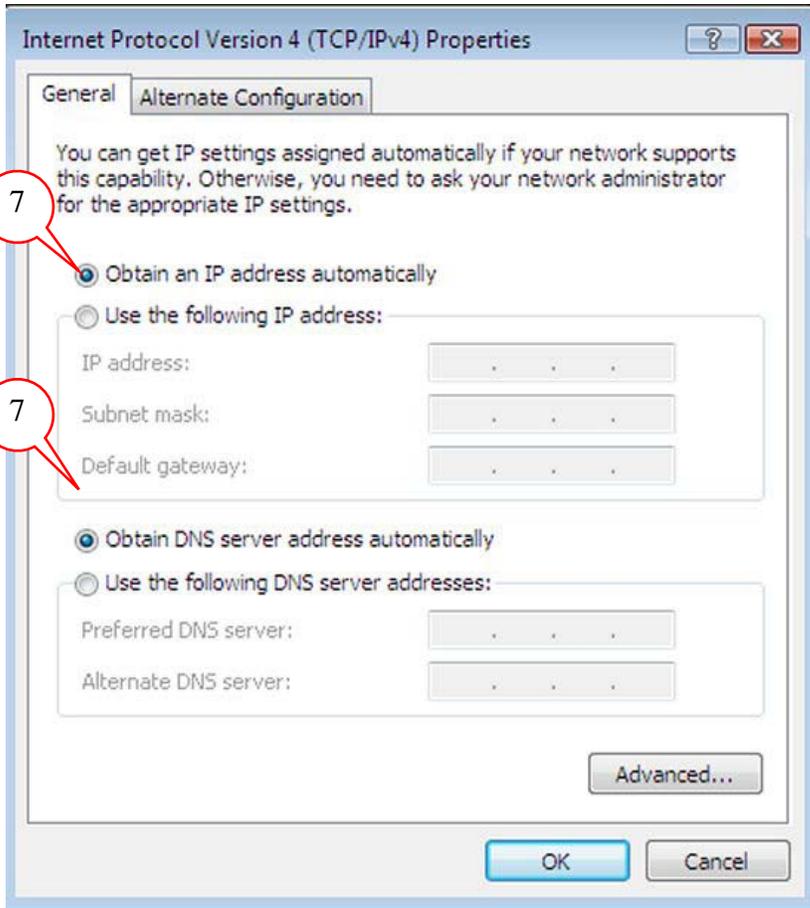

7) To remove static IPs, click the buttons next to "Obtain an IP address automatically". And obtain DNS server address automatically. TCP/IP, by default, is set to "Obtain an IP address automatically" and "Obtain DNS server address automatically."

8) Click **OK** in the Internet protocol (TCP/IP) properties window. Click **OK** In the Local Area Connection properties window.